




Marquee Flooring

The Custom Covers reversible flooring offers a versatile, reliable and sturdy flooring surface. Our flooring system allows one extrusion and one board length to work with the full Coverspan range.


Key Features of this floor:

- Only one floorboard length (2.95m) for full tent range
- One extrusion silhouette, varying in length depending on tent size
- Can use with standard stepover baseplates
- Versatile and light weight
- Works with our steel sub-frame floor

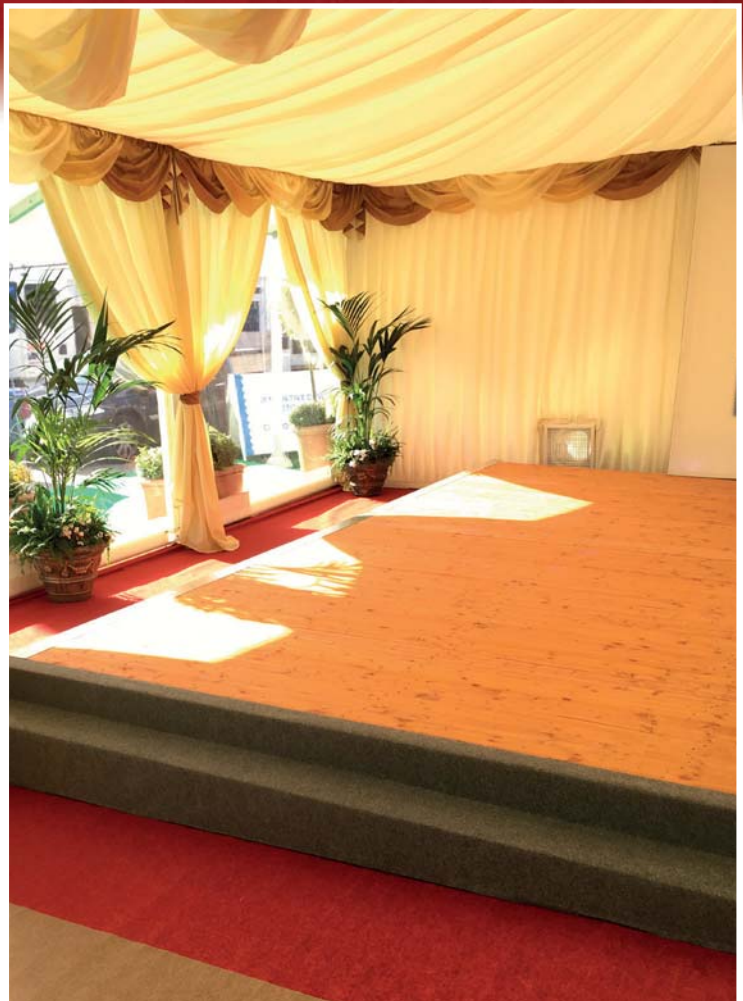



For 3/6/9m structures, place the floor into this part of the extrusion

3/6/9m

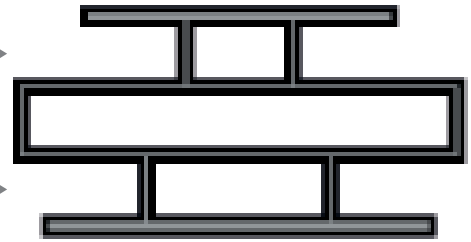

For 12/15m structures, place the floor into this part of the extrusion

12/15m

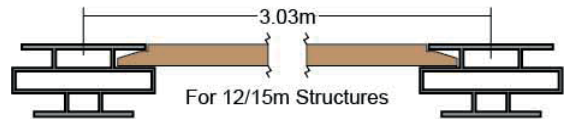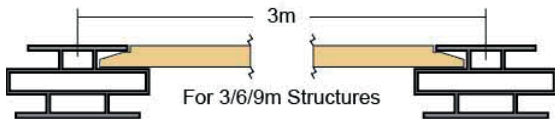

This innovative design allows a 3m centre leg to centre leg for the 3/6/9m structures, and a 3.03m for 12/15m structures. Both configurations can be used with a standard stepover baseplate.



Steel Sub-Frame with Floor



Standard Stepover plate



Sub-Frame Stepover Plate

Sub-Frame Flooring

Our steel sub-frame floor is designed to work with Custom Covers' revolutionary aluminium floor extrusion. The sub-frame can be used to ensure the floor is level whilst adding extra structural support to the flooring.

Flooring Technical Specifications

Longest component :	3.06m
Floor Boards:	Pressure treated impregnated larch pine
Board size:	2.95m x 0.5m for standard boards and 2.95m x 0.6m for the infill board
Time to install:	1.5hr (9m x 21m marquee)
Number of people required:	4
Weight:	16kg per. Floorboard
Standard floor load limit:	400kg/m ²

INNOVATIVE DESIGN
custom made with customers in mind



Industrial Fabrics
Association International



Custom Covers (1984) Ltd
Quayside Road, Bitterne Manor
Southampton SO18 1AD

Tel: +44 (0)23 8033 5744
Fax: +44 (0)23 8022 5581

sales@customcovers.co.uk
www.customcovers.co.uk